


32.28 ± 0.20
29.88 (V.A)

MAX 1.90
0.70*2

PIN CONNECTION

NO	SYMBOL
1	XRESET
2	RS
3	CSB
4	RW
5	E
6	DB4
7	DB5
8	DB6
9	DB7
10	VSS
11	VDD
12	V0

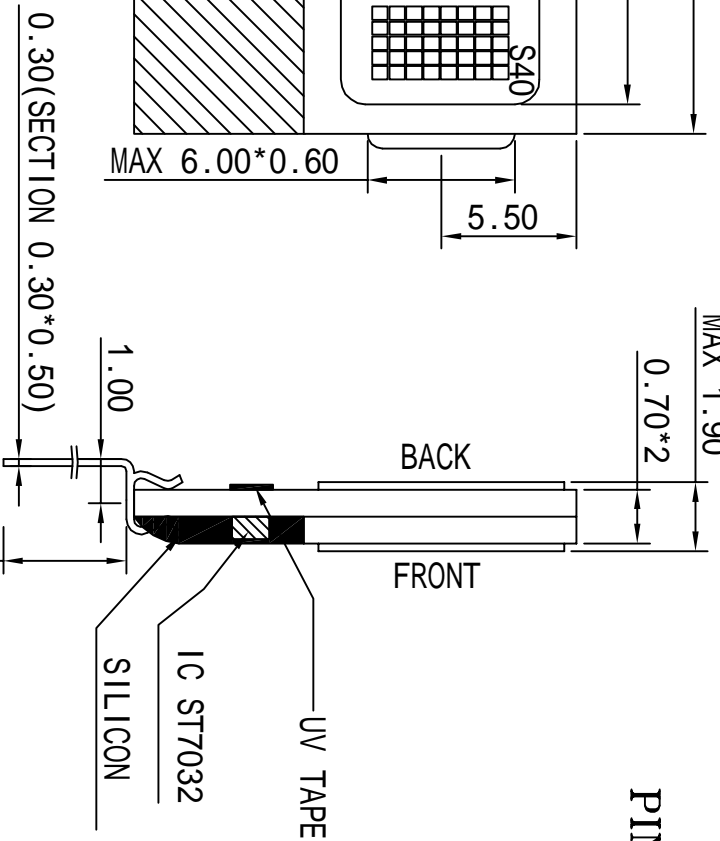


LCD	IC
C1-C8	COM9-COM16
S1-S40	SEG1-SEG40

TABLE DISPLAY

Y	F
Y	TRANSELECTIVE, YELLOW-GREEN, STN
F	TRANSELECTIVE, FSTN

NOTES:

1. VIEWING ANGLE: 6:00 O' CLOCK
2. DISPLAY MODE: POSITIVE/TABLE DISPLAY
3. DRIVING VOLTAGE: 3.3V, DUTY: 1/8, BIAS: 1/4
4. OPERATING TEMP.: -20° C TO 70° C
5. STORAGE TEMP.: -25° C TO 75° C
6. CONNECTOR: COG&PIN TYPE

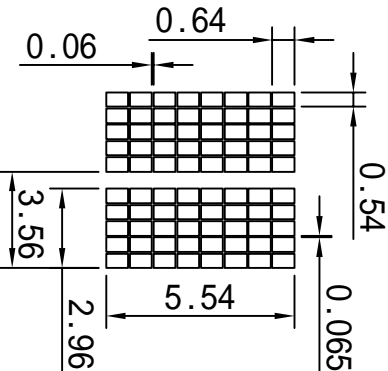

NO	MODIFY CONTENTS	DATE	DESIGN	APP	BY
6	MODIFY PIN TYPE	LHB	040225		
5	MODIFY PIN TYPE	LHB	040224		
4	MODIFY IC	LHB	031207		
3	MODIFY SIZE (LINE SIZE), A SIZE	YK	031202		
2	MODIFY PIN LEN, AUTO SIZE, DRIVING VOL.	CSH	031126	DESIGN BY	CSH
1	MODIFY DRIVING VOL., ADOPER. TEMP.	CSH	031121	CHECKED BY	

VER. 1.0

DATE: 20/11-03

DESIGN BY: CSH

CHECKED BY:

APPROVED BY:

DATE:

SCALE:

SHEET 1 OF 2

XIAMEN OCULAR LCD DEVICES CO., LTD

TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.20
Y ±0.10
Z ±0.10
H UNLESS SPECIFIED
CUSTOMER: BOL

APPLICATION:
 Instrument
 Display
 Control Panel
 Control Panel
 Other