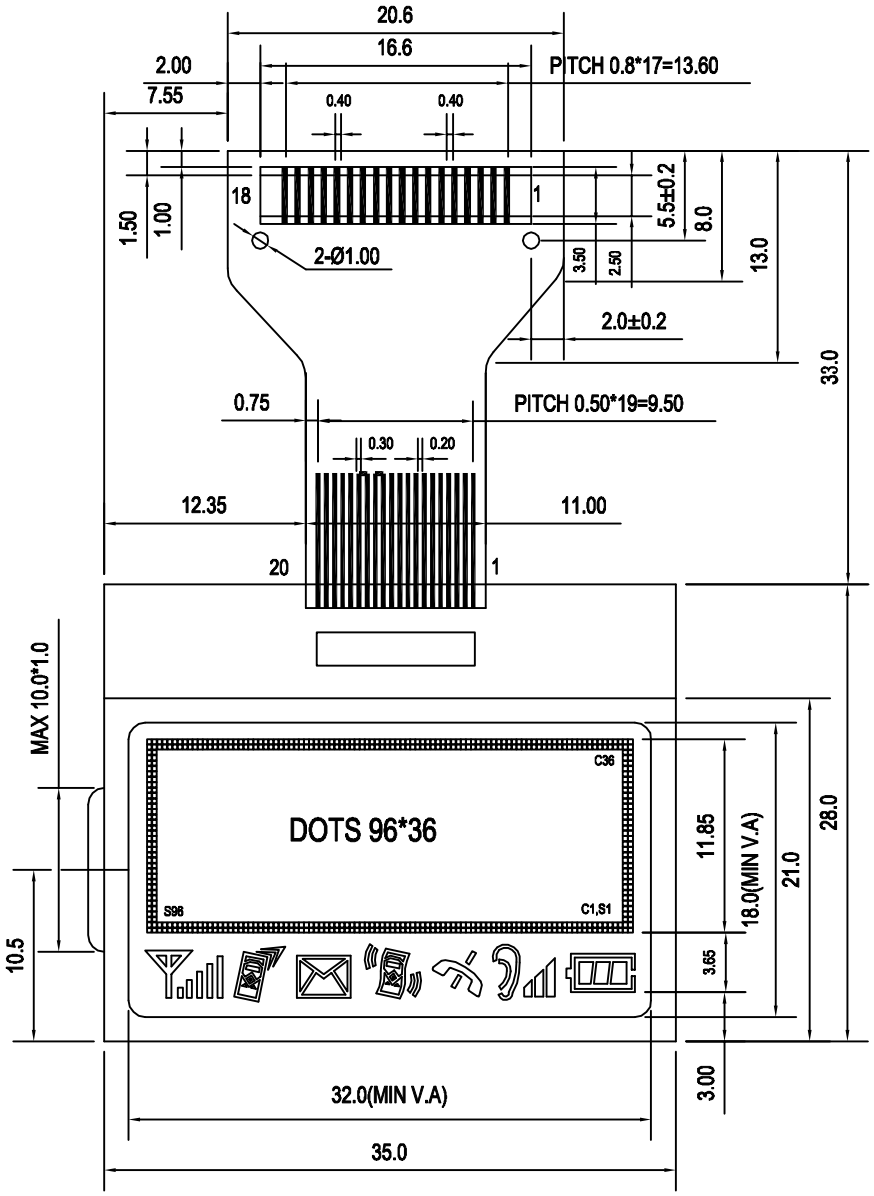

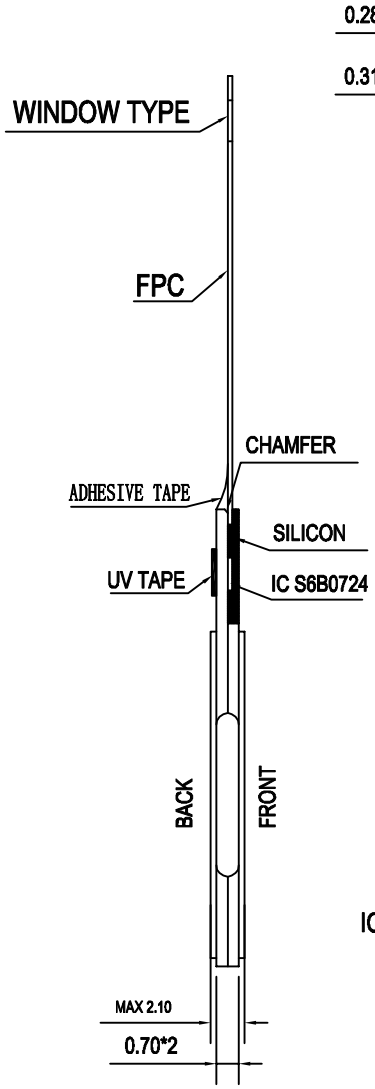

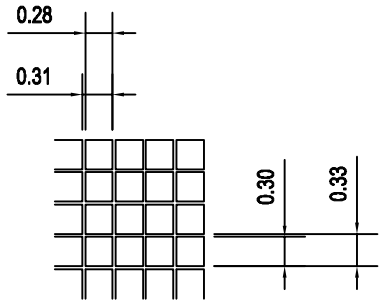

PIN CONNECTION

NO	SYMBOL
1	V0
2	V4
3	V3
4	V2
5	V1
6	C2-
7	C2+
8	C1+
9	C1-
10	C3+
11	VOUT
12	VSS
13	VDD
14	SID
15	SCLK
16	RS
17	/RESET
18	/CS1

LCD	IC
C1-C16	COM55-COM40
C17-C36	COM23-COM4
S1-S96	SEG0-SEG95

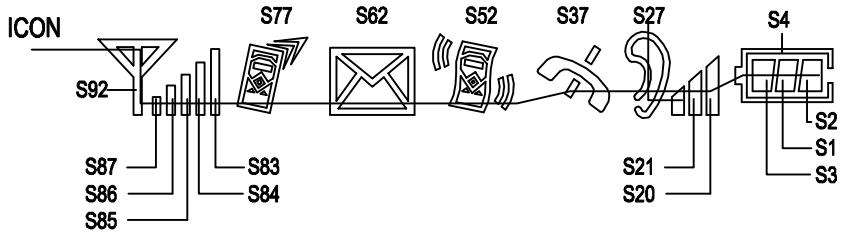

TABLE1

MODE	R	F	T
Y	POSITIVE,REFLECTIVE YELLOW-GREEN,STN TYPE	POSITIVE,TRANSFLECTIVE YELLOW-GREEN,STN TYPE	POSITIVE,TRANSMISSTIVE YELLOW-GREEN,STN TYPE
G	POSITIVE,REFLECTIVE GRAY,STN TYPE	POSITIVE,TRANSFLECTIVE GRAY,STN TYPE	POSITIVE,TRANSMISSTIVE GRAY,STN TYPE
B		NEGATIVE,TRANSFLECTIVE BLUE,STN TYPE	NEGATIVE,TRANSMISSTIVE BLUE,STN TYPE
F	POSITIVE,REFLECTIVE FSTN TYPE	POSITIVE,TRANSFLECTIVE FSTN TYPE	POSITIVE,TRANSMISSTIVE FSTN TYPE
W		NEGATIVE TRANSFLECTIVE BLACK-WHITE STN	NEGATIVE TRANSMISSIVE BLACK-WHITE STN

NOTES:
1. VIEWING ANGLE: 6:00 O'CLOCK
2. DISPLAY MODE:AS IS SHOWN IN TABLE1
3. DRIVING VOLTAGE: 7.0V,DUTY:1/49,BIAS:1/8,FREQUENCY:64Hz
4. OPERATING TEMP.:0° C TO 50° C
5. STORAGE TEMP.:-20° C TO 70° C
6. CONNECTOR:COG+FPC TYPE

VER.	MODIFY CONTENTS	DATE	DESIGN
6			
5			
4			
3			
2			
1	MODIFY LOGIC	2003.7.9	YK/LHB

XIAMEN OCULAR LCD DEVICES CO., LTD

PART NO. GDSC-[illegible]-9649M-01

DESIGN BY L.J.Q 28/03-03

CHECKED BY

APP BY

APPLICATION: ☐Instrument ☐Audio Equipments ☐Household Lock ☐Telephone ☐Automobile ☐Other ☐Home Appliances ☐Air-condition

CUSTOMER: XINGTEL (96*36DOTS+17ICON) SAMPLE: ☐Yes ☐No

COMPOSE TYPE: ☐COG ☐FLEX

SHEET 1 OF 2