
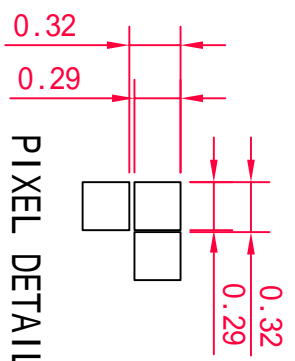


| PIN FUNCTION | |
|--------------|------|
| NO. SYMBOL | |
| 1 | CSB |
| 2 | RSTB |
| 3 | A0 |
| 4 | SCLK |
| 5 | SDA |
| 6 | VDD |
| 7 | VSS |
| 8 | V0 |
| 9 | XV0 |
| 10 | VG |

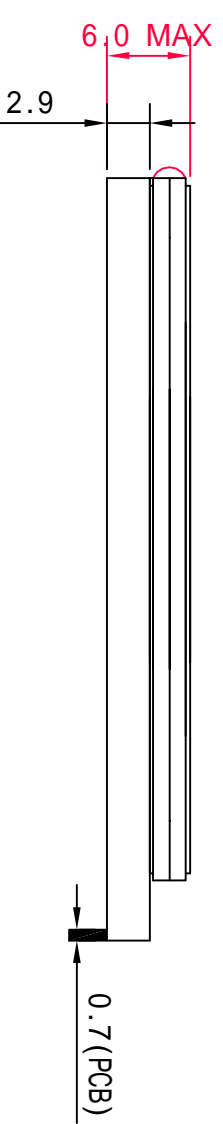

PIXEL DETAILS

NOTE:

1. DISPLAY TYPE: FSTN, TRANSPARENTIVE/POSITIVE
2. VIEWING ANGLE: 6:00 O'CLOCK
3. DRIVING VOLTAGE: 6.5V, DUTY: 1/32, BIAS: 1/6, FREQUENCY: 64HZ
4. LOGIC SUPPLY VOLTAGE: 3.0V
5. OPERATING TEMP.: -20° C TO 70° C
6. STORAGE TEMP.: -30° C TO 80° C
7. IC DRIVING: ST7567
8. BACKLIGHT: LED/(WHITE) 3.0V 20mA
9. CONNECTOR: PIN TYPE

XIAMEN OCULAR OPTICS CO.,LTD

| REVISION RECORD | | | Drawn: | Model Name: |
|-----------------|------|-----------------|-----------|-------------------|
| VER | Date | Modify Contents | SKY | GDC12832A-FSW-FBW |
| 2 | | | Checker: | Date: |
| 3 | | | Approved: | 2009-11-24 |
| 4 | | | | |
| 5 | | | | |
| 6 | | | Page: 1-1 | |

