

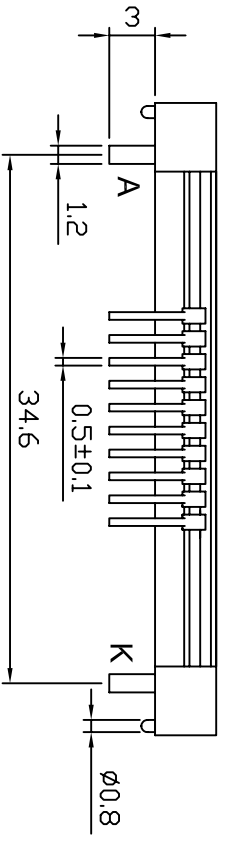
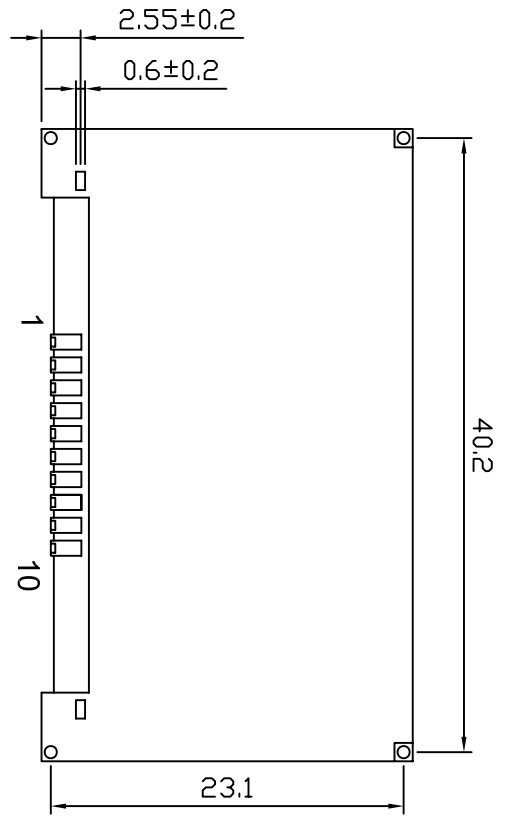
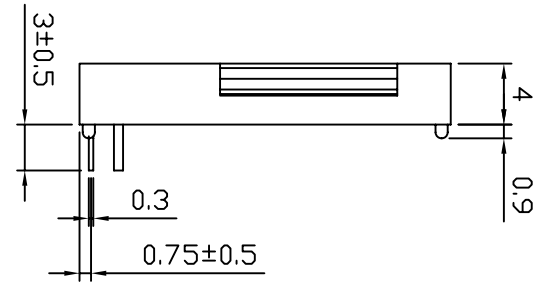
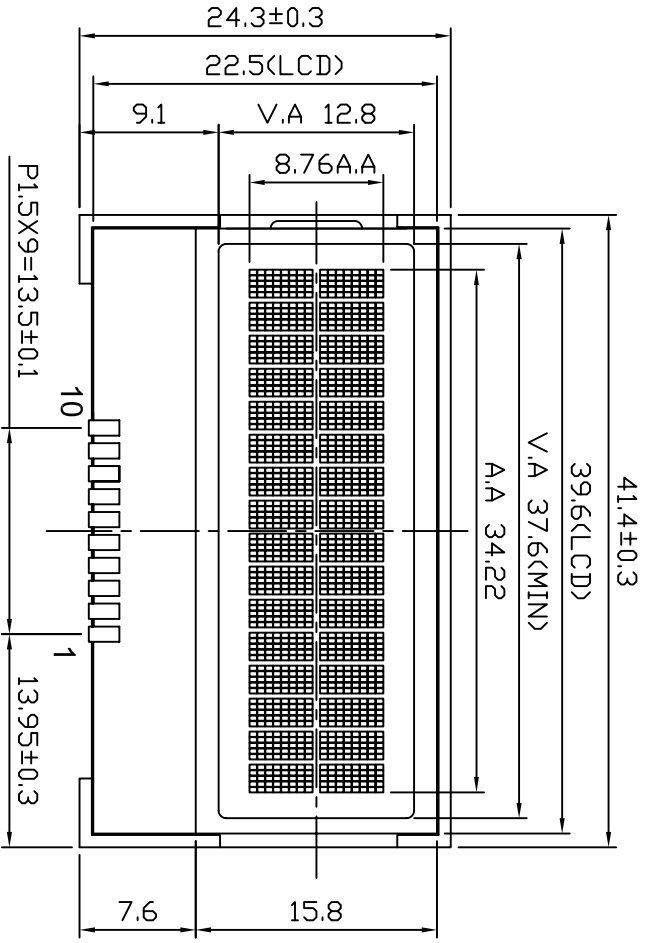


REV	DESCRIPTION:	DATE
-----	--------------	------

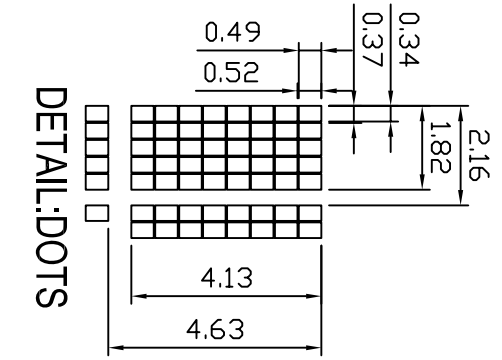

Feature:

1. Display mode: STN(Blue)/ Negative/ Transmissvie
2. Driving: Duty:1/16, 1/5 Bias, VLCD:5.5V
3. Viewing Direction: 6 O'clock
4. Backlight: LED sidelight(Color: White)
5. Driver : ST7032 VDD:3.3 V
6. Operating temp. : -20° C~ + 70° C
Storage temp. : -25° C~ + 80° C
7. ROHS Compliant

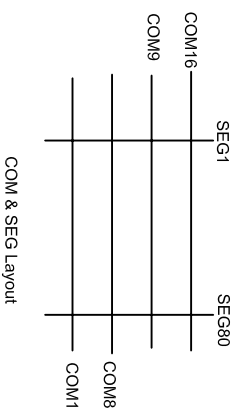

PIN	SIGNAL
1	RST
2	RS
3	CSB
4	SCL
5	SI
6	VSS
7	VDD
8	VOUT
9	C1+
10	C1-
A	LED+
K	LED-

Model Name: GDC1602F-NSW-BBW		UNLESS OTHERWISE STATED		SCALE:	
APPROVALS	DATE	TOLERANCES:		UNIT: mm	
DWN: Lin	2018.03.22	XX.X ±0.20	XX.X ±0.10	Page: 1-1	
CHK:		SIZE: A4			
APP:					

Xiamen Ocular Optics CO., LTD.