
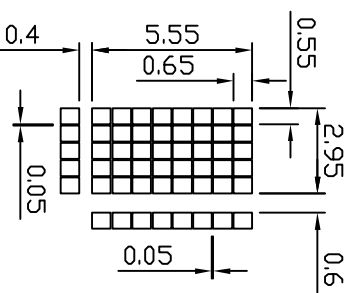


REV	DESCRIPTION:	DATE
-----	--------------	------

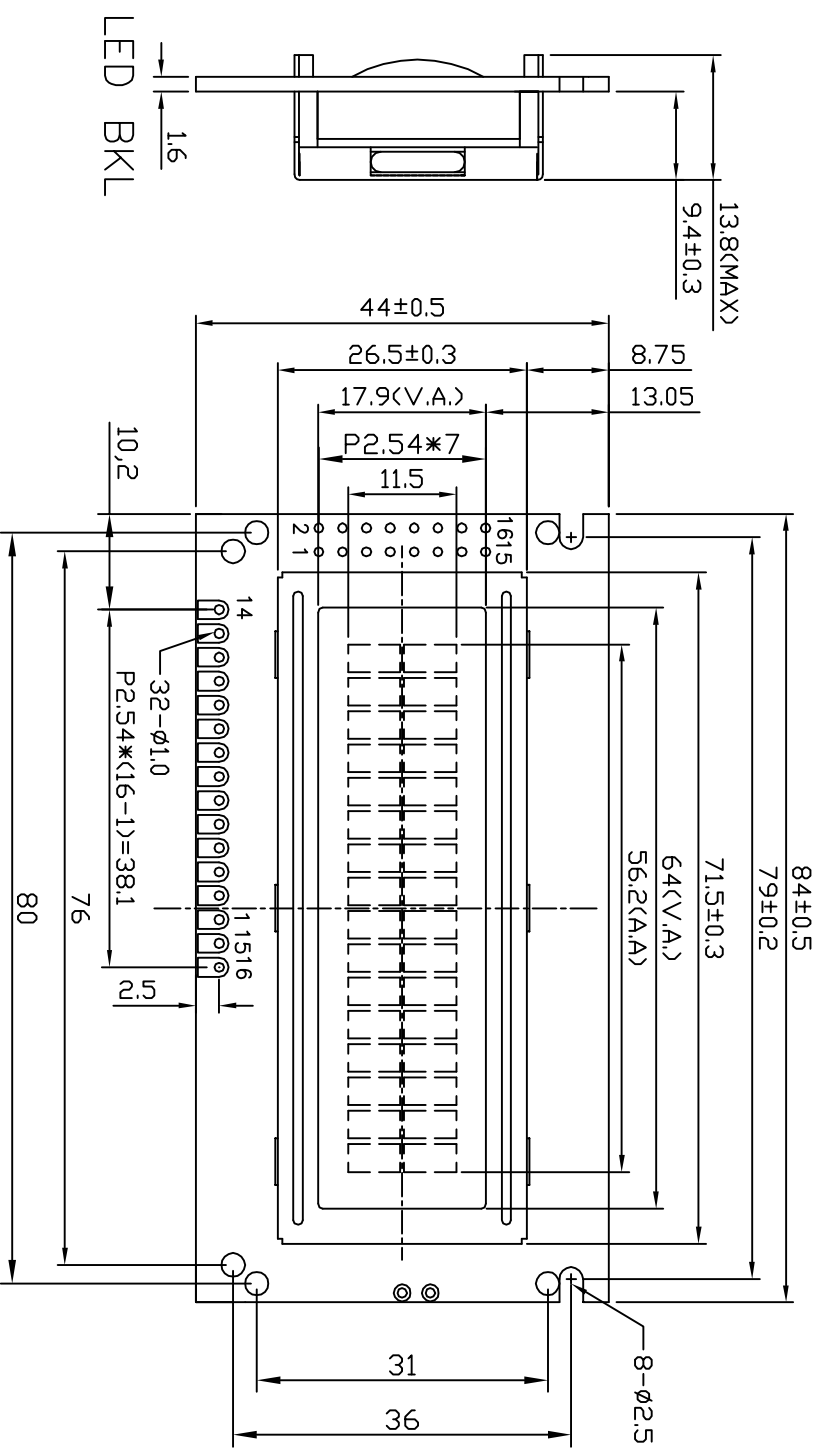

Display Pattern

PIN	SIGNAL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED+
16	LED-

Feature:

1. Display mode: STN(Yellow-green)/Positive/transflective
2. Driving: Duty:1/16, 1/5 Bais, VLCD: 4.5V
3. Viewing Direction: 6 O'clock
4. Backlight: Yellow-green LED Backlight
5. Driver : ST7066U-0A VDD: 5.0 V
6. Operating temp. : -20° C~ + 70° C
- Storage temp. : -30° C~ + 80° C
7. ROHS Compliant

Model Name: GDM1602AL-FL-YBW		DRAWN NO.		SCALE:	
GENERAL TOL: ± 0.2		DATE		UNIT: mm	
APPROVALS		DWN: ALAN		2012.04.25	
CHK:		APP:		SIZE: A4	
Xiamen Ocular Optics CO., LTD.		Page: 1-1			