
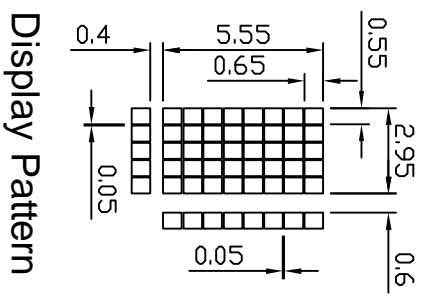


REV	DESCRIPTION:	DATE
-----	--------------	------

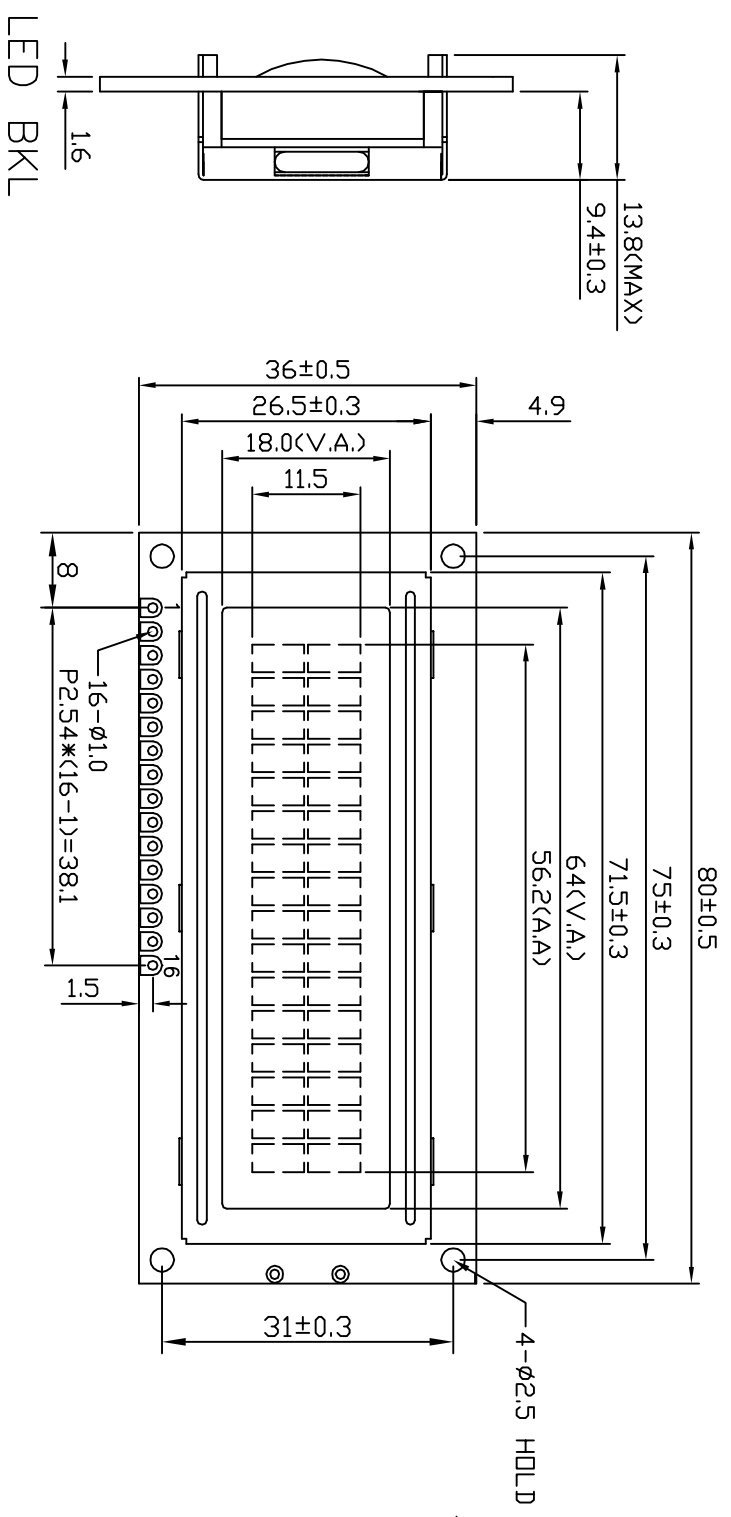

Display Pattern

PIN	SIGNAL
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	R/S
12	V0
13	VDD
14	VSS
15	LED+
16	LED-

Feature:

1. Display mode: STN(Yellow-green), positive , Transflective
2. Driving: Duty:1/16, 1/5 Bais, VLCD: 4.5V
3. Viewing Direction: 6 O'clock
4. Backlight: Yellow-green LED Backlight
5. Driver :ST7066U-0T VDD: 5.0 V
6. Operating temp. : -20° C~ + 70° C
- Storage temp. : -30° C~ + 80° C
7. ROHS Compliant

Model Name: GDM1602AP-FL-YBW-0T		DRAWN NO.		SCALE:	
GENERAL TOL: ± 0.2		DATE		UNIT: mm	
APPROVALS		DWN: ALAN		2012.06.29	
CHK:		APP:		SIZE: A4	
Xiamen Ocular Optics CO., LTD.		Page: 1-1			