


TOLERANCES UNLESS OTHERWISE STATED
 . ±0.30
 X ±0.20
 ANGLES±1°
 ALL DIMENSIONS IN MM

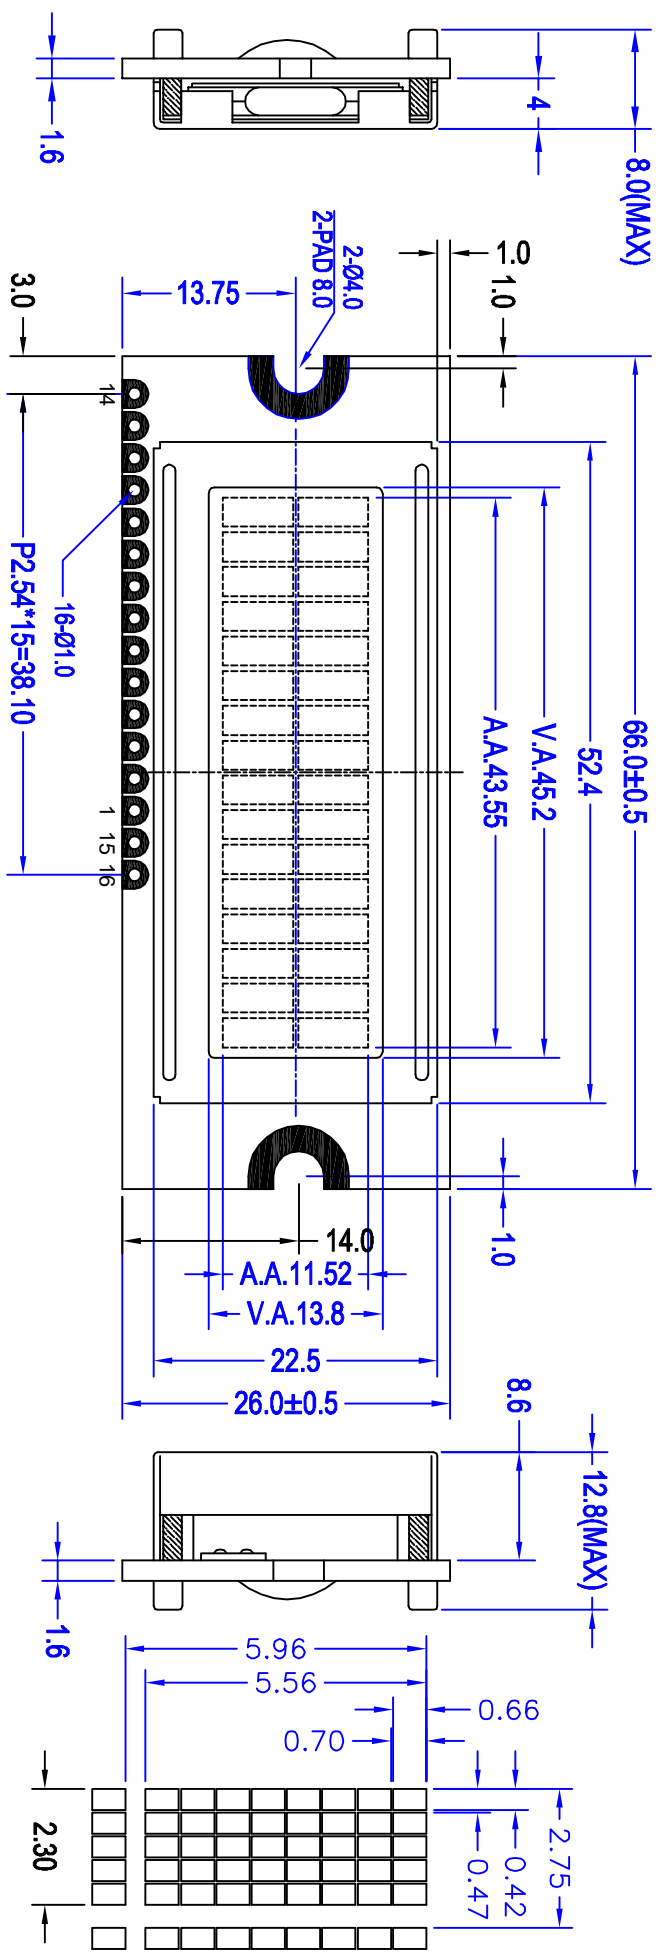

Unit:mm

GENERAL SPECIFICATIONS

LCD TYPE	<input type="checkbox"/> TN <input type="checkbox"/> HTN <input checked="" type="checkbox"/> STN <input type="checkbox"/> FSTN
POLARIZER MODE	<input type="checkbox"/> REFLECTIVE
	<input checked="" type="checkbox"/> TRANSMISSIVE
DISPLAY COLOR	<input checked="" type="checkbox"/> TRANSMISSIVE
VIEWING ANGLE	<input checked="" type="checkbox"/> YELLOW <input type="checkbox"/> GRAY <input type="checkbox"/> BLUE
BACKLIGHT	<input checked="" type="checkbox"/> 6 OCLOCK <input type="checkbox"/> 12 OCLOCK
BACKLIGHT COLOR	<input type="checkbox"/> BACK <input type="checkbox"/> SIDE <input type="checkbox"/> EL <input type="checkbox"/> CCFL
TEMPERATURE RANGE	<input checked="" type="checkbox"/> Y-G <input type="checkbox"/> RED <input type="checkbox"/> GREEN <input type="checkbox"/> BLUE
BUILT IN CONTROLLER	<input checked="" type="checkbox"/> STANDARD <input type="checkbox"/> WIDE
	ST7070-0B OR EQUIVALENCE

INTERFACE PIN CONNECTIONS

PIN	SIGNAL	PIN	SIGNAL
1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	LED-
8	DB1	16	LED+

XIAMEN OCULAR OPTICS CO., LTD

REVISION RECORD

VER.	DESCRIPTION	DRAWN BY/DATE	CHECKED BY/DATE	APPROVED BY/DATE	Model Name:	DESIGN BY/DATE:	CHECKED BY/DATE:	APPROVED BY/DATE:	SHEET:
1					GDM1602AN-FL-YBW/-1	ALAN		2012-05-28	
2									
3									
4									
5									

